

Sophos XG Firewall

Unrivalled simplicity, security and insight

Sophos XG Firewall brings a fresh new approach to the way you manage your firewall, respond to threats, and monitor what's happening on your network. Get ready for a whole new level of simplicity, security and insight.



SOPHOS X0280 SOPHOS Protection	
SOPHOS X0.380 SOPHOS Protection	
SOPHOS X0450 SOPHOS Protection	
SOPHOS X0 650 O C SOPHOS O Protection Detruit CEC A V	
SOPHOS x0750 O C SOPHOS O Protection EVENUE CEE A V	

Sophos XG Firewall – The next thing in next-gen

XG Firewall is optimized for today's business, delivering all the protection and insights you need in a single, powerful appliance that's easy to manage.

Advanced protection made simple

Most firewall products make you set up and manage policies across multiple modules or screens. Not Sophos. We provide a powerful unified policy model that allows you to manage, view, filter, and sort all your user, application and network policies on a single screen.

More-in-one protection

You get all the next-gen firewall features you need plus features you can't get anywhere else – including our revolutionary Security Heartbeat[™], full web application firewall, and complete email anti-spam, encryption and DLP. No extra hardware. No extra cost. Simply choose what you want to deploy.

On-box reports included as standard

With hundreds of built-in reports you'll know exactly what's happening with your users and your network. You get detailed reports as standard, stored locally with no separate tools required. And our unique User Threat Quotient reports show you which of your users are putting your security at risk.

Potent, powerful ... fast

We've engineered XG Firewall to deliver outstanding performance. Our appliances are built using Intel multicore technology, solid-state drives, and accelerated inmemory content scanning. In addition Sophos FastPath packet optimization technology ensures you'll always get maximum throughput.

Simply manage multiple firewalls

Sophos Firewall Manager provides a single console for the complete central management of multiple XG Firewalls. And if you also want to consolidate reporting across multiple XG, SG, and Cyberoam appliances then with Sophos iView, you can.



Security features you can't get anywhere else

XG Firewall includes a number of innovations that not only makes your job a lot easier, but also ensures your network is more secure.

A revolution in advanced threat protection – Sophos Synchronized Security

An industry first, Synchronized Security links your endpoints and your firewall to enable unique insights and coordination. Security HeartbeatTM relays Endpoint health status and enables your firewall to immediately identify and respond to a compromised system on your network. The firewall can isolate systems until they can be investigated and cleaned up. Another Synchronized Security feature, Dynamic App Identification, also enables the firewall to query the endpoint to determine the source of unknown traffic on the network.

Patented Layer-8 identity control

User identity takes enforcement to a whole new layer with our patented Layer-8 identity based policy technology enabling user level controls over applications, bandwidth and other network resources regardless of IP-address, location, network or device. It literally takes firewall policy to a whole new layer.

Policy templates get you protected fast

Pre-defined policy templates let you protect common applications like Microsoft Exchange or SharePoint quickly and easily. Simply select them from a list, provide some basic information and the template takes care of the rest. It sets all the inbound/ outbound firewall rules and security settings for you automatically – displaying the final policy in a statement in plain English.

Automated user risk reports

The Sophos User Threat Quotient (UTQ) indicator is a unique feature which provides actionable intelligence on user behavior. Our firewall correlates each user's surfing habits and activity with advanced threat triggers and history to identify users with risk-prone behavior.

Flexible deployment, no compromise


To find out more visit www.sophos.com/xgfirewall

Unlike our competitors whether you choose hardware, software, or virtual we don't make you compromise – every feature is available on every model and form- factor.

Purpose-built devices to provide the ultimate in performance.




Install the Sophos Firewall OS image on your own Intel hardware or server.



Install on VMware, Citrix, Microsoft Hyper-V and KVM.



Protect your network infrastructure in the Azure cloud.



Network Protection

All the protection you need to stop sophisticated attacks and advanced threats while providing secure network access to those you trust.

Next-gen Intrusion Prevention System

Provides advanced protection from all types of modern attacks. It goes beyond traditional server and network resources to protect users and apps on the network as well.

Advanced Threat Protection

Instant identification and immediate response to today's most sophisticated attacks. Multi-layered protection identifies threats instantly and Security Heartbeat[™] provides an emergency response.

Security Heartbeat

Creates a link between your Sophos Cloud Endpoints and your Firewall to identify threats faster, simplify investigation and minimize impact from attacks. Easily incorporate Heartbeat status into firewall policies to automatically isolate compromised systems.

Advanced VPN technologies

Adds unique and simple VPN technologies including our clientless HTML5 self-service portal that makes remote access incredibly simple or utilize our exclusive light-weight secure RED (Remote Ethernet Device) VPN technology.

Web Protection

Comprehensive web protection and application control with powerful and flexible policy tools ensure your networked users are secure and productive.

Powerful user and group web policy

Provides enterprise-level Secure Web Gateway policy controls to easily manage sophisticated user and group web controls.

Advanced Web Threat Protection

Backed by SophosLabs, our advanced engine provides the ultimate protection from today's polymorphic and obfuscated web threats. Innovative techniques like JavaScript emulation, behavioral analysis, and origin reputation help keep your network safe.

High performance transparent proxy

Optimized for top performance, our transparent proxy technology provides ultra-low latency inspection and HTTPS scanning of all traffic for threats and compliance.

Layer-8 Application Control and QoS

Enables user-aware visibility and control over thousands of applications with granular policy and traffic-shaping (QoS) options based on application category, risk, and other characteristics.

Sandstorm Protection

Sophos Sandstorm uses next-gen cloud-sandbox technology to give your organization an extra layer of security against ransomware and targeted attacks.

It integrates with your XG Firewall and is cloud-delivered so there's no additional hardware required. Sophos Sandstorm blocks evasive threats like ransomware, disguised as executables, PDFs, and Microsoft Office documents — sending them to a cloud-sandbox to be detonated and observed in a safe environment. Threat intelligence is fed back to your XG Firewall and the file blocked or permitted. The process takes just a couple of minutes with minimal impact for the user. And Sandstorm gives you detailed threat reports for every incident so you know exactly what's going on.

Email Protection

Full SMTP and POP message protection from spam, phishing and data loss with our unique all-in-one protection that combines policy-based email encryption with DLP and anti-spam.

Integrated Message Transfer Agent

Ensures always-on business continuity for your email, allowing the firewall to automatically queue mail in the event servers become unavailable.

Live Anti-Spam

Provides protection from the latest spam campaigns, phishing attacks, and malicious attachments .

Self-serve Quarantine

Gives employees direct control over their spam quarantine, saving you time and effort.

Web Server Protection

SPX Email Encryption

Unique to Sophos, SPX makes it easy to send encrypted email to anyone, even those without any kind of trust infrastructure using our patent-pending password-based encryption technology.

Data Loss Prevention

Policy based DLP can automatically trigger encryption or block/notify based on the presence of sensitive data in emails leaving the organization.

Harden your web servers and business applications against hacking attempts with a full-featured Web Application Firewall while providing secure access with reverse proxy authentication.

Business Application Policy Templates

Pre-defined policy templates let you protect common applications like Microsoft Exchange Outlook Anywhere or SharePoint quickly and easily.

Protection from the latest hacks and attacks

With a variety of advanced protection technologies including URL and form hardening, deep-linking and directory traversal prevention, SQL injection and cross-site scripting protection, cookie signing and more.


Reverse proxy

With authentication options, SSL offloading, and server load balancing ensure maximum protection and performance for your servers being accessed from the internet.



How to Buy

Every XG Firewall comes equipped with Base Firewall functionality including IPSec, SSL VPN, and Wireless Protection. You can extend protection with our Total Protection bundles or by adding protection modules individually.

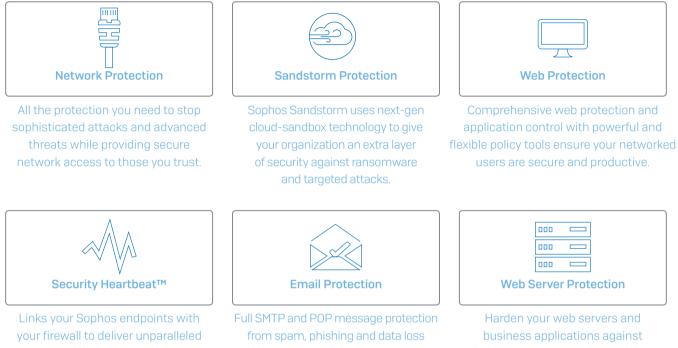

protection from advanced threats and reduce the time and complexity of responding to security incidents. Full SMTP and POP message protection from spam, phishing and data loss with our unique all-in-one protection that combines policy-based email encryption with DLP and anti-spam. Harden your web servers and business applications against hacking attempts while providing secure access to external users with reverse proxy authentication.

A simple approach to comprehensive support

We build products that are simple yet comprehensive. And, we take the same approach with our support. With options ranging from basic technical support to those including direct access to senior support engineers and customized delivery.

Licenses names	Standard Included with purchase	Enhanced Included in all bundles	Enhanced Plus
Support Via telephone and email	For 90 days (business hours only)	Included (24x7)	VIP Access (24x7)
Security Updates & Patches For the life of the product	Included with an active software subscription	Included with an active software subscription	Included with an active software subscription
Software Feature Updates & Upgrades	Included 90-days	Included	Included
Consulting Remote consultation on your firewall configuration and security with a Sophos Senior Technical Support Engineer			Included (up to 4 hours)
Warranty and RMA For all hardware appliances	1 year (return / replace)	Advance Exchange (max. 5 years)	Advance Exchange (max. 5 years)
Technical Account Manager Dedicated named technical account manager		Optional (extra cost)	Optional (extra cost)

Sophos XG Series Appliances – at a glance

Our XG Series hardware appliances are purpose-built with the latest multi-core Intel technology, generous RAM provisioning, and solid-state storage. Whether you're protecting a small business or a large datacenter, you're getting industry leading performance.

Product Matrix

Model				Tech. Specs			Throughput ¹		
	Revision #	Form Factor	Ports/Slots (Max Ports)	w-model 802.11 wireless	Swappable Components	Firewall (Mbps)	VPN (Mbps)	NGFW (Mbps)	AV-proxy (Mbps)
XG 85(w)	1	desktop	4	a/b/g/n	n/a	2000	200	235	330
XG 105(w)	2	desktop	4	a/b/g/n	n/a	3000	300	270	430
XG 115(w)	2	desktop	4	a/b/g/n	n/a	3,500	350	310	520
XG 125(w)	2	desktop	8	a/b/g/n/ac	n/a	5,000	410	360	590
XG 135(w)	2	desktop	8	a/b/g/n/ac	n/a	7,000	950	880	1,400
XG 210	3	10	8/1(16)	n/a	opt. ext. Power	16,000	1,450	2,200	2,300
XG 230	2	10	8/1(16)	n/a	opt. ext. Power	20,000	1,700	3,000	2,800
XG 310	2	10	12/1 (20)	n/a	opt. ext. Power	28,000	2,750	4,000	3,300
XG 330	2	10	12/1 (20)	n/a	opt. ext. Power	33,000	3,200	5,500	6,000
XG 430	2	10	10/2 (26)	n/a	opt. ext. Power	41,000	4,800	6,000	6,500
XG 450	2	10	10/2 (26)	n/a	opt. int. Power	50,000	5,500	7,500	7,000
XG 550	2	20	8/4 (32)	n/a	Power, SSD, Fan	65,000	8,400	9,000	10,000
XG 650	2	20	8/6 (48)	n/a	Power, SSD, Fan	85,000	9,000	10,000	13,000
XG 750	2	20	8/8 (64)	n/a	Power, SSD, Fan	100,000	11,000	11,800	17,000

Sophos XG Firewall TotalProtect Plus Bundle

For the ultimate in protection, value, and peace-of-mind, get our convenient TotalProtect Plus bundle.

What you get	TotalProtect Plus Bundle
Base Firewall Firewall, IPsec and SSL VPN, Wireless Protection (APs sold separately)	~
Network Protection IPS, RED, HTML5 VPN, ATP, Security Heartbeat	~
Web Protection Anti-malware, Web and App visibility, control, and protection	~
Email Protection Anti-spam, SPX Email Encryption, and DLP	~
Web Server Protection Web Application Firewall and reverse proxy	~
Sandstorm Protection next-gen cloud-sandbox technology	~
Enhanced Support 24x7 support, security and software updates, adv. exchange warranty	~
XG Series Hardware Appliance Multi-core Intel processor, solid-state storage, flexible connectivity	~

Sophos XG Series Desktop Appliances: XG 85 and XG 85w

Technical Specifications

These entry-level desktop firewalls are the ideal choice for budget-conscious small businesses, retail and small or home offices. They are available with and without integrated wireless LAN, so you can have an all-in-one network security and hotspot solution without the need for additional hardware. The Intel dual-core technology makes them highly efficient and as they're fanless, they won't add unwanted noise to your office space.

Note: The XG 85 and 85w do not support some advanced features like on-box reporting, dual AV scanning, WAF AV scanning and the email message transfer agent (MTA) functionality. If you need these capabilities, the XG 105(w) is recommended.



Back View



Environment		
Power consumption	3.24W, 11.04 BTU/h (idle) 5.64W, 19.232 BTU/h (full load)	
Operating temperature	0-40°C (operating) -20 to +80°C (storage)	
Humidity	10%-90%, non-condensing	
Product Certifications		
Certifications	CB, CE, FCC Class B, IC, VCCI, MIC, RCM, UL, CCC	

Performance ¹	XG 85(w) Rev. 1
Firewall throughput	2 Gbps
Firewall IMIX	780 Mbps
VPN throughput	200 Mbps
IPS throughput	510 Mbps
NGFW (IPS + App Ctrl + WebFilter) max.	235 Mbps
Antivirus throughput (proxy)	330 Mbps
Concurrent connections	2,000,000
New connections/sec	18,000
Maximum licensed users	unrestricted

Wireless Specification (XG 85w only)		
No. of antennas	2 external	
MIMO capabilities	2 x 2:2	
Wireless interface	802.11a/b/g/n (2.4 GHz / 5 GHz)	

Physical interfaces		
Storage	8 GB eMMC	
Ethernet interfaces (fixed)	4 GE copper	
I/O ports (rear)	2 x USB 2.0 1 x COM (RJ45)	
Power supply	External auto ranging DC: 12V, 100-240VAC, 50-60 Hz	

Physical specifications		
Mounting	Rackmount kit available (to be ordered separately)	
Dimensions Width x Depth x Height	225 x 150 x 44 mm 8.86 x 5.91 x 1.73 inches	
Weight	0.95 kg / 2.09 lbs (unpacked) 1.97 kg / 4.34 lbs (packed)	

Sophos XG Series Desktop Appliances: XG 105, XG 105w, XG 115, XG 115w


Technical Specifications

These desktop firewall appliances offer an excellent price-to-performance ratio making them ideal for small businesses or branch offices. They are available with or without integrated wireless LAN, so you can even have an all-in-one network security and hotspot solution without the need for additional hardware. Of course, you can also add external access points. With Intel multi-core technology designed for best performance and efficiency in a small form factor, these models come equipped with 4 GbE copper ports built-in.

Front View



Back View



Environment		
Power consumption	4.83W, 16.468 BTU/hr (idle) 9.84W, 33.55 BTU/hr (full load)	
Operating temperature	0-40°C (operating) -20 to +80°C (storage)	
Humidity	10%-90%, non-condensing	
Product Certifications		
Certifications	CB, CE, FCC Class B, IC, VCCI, MIC, RCM, UL, CCC	

Performance ¹	XG 105(w) Rev. 2	XG 115(w) Rev. 2
Firewall throughput	3 Gbps	3.5 Gbps
Firewall IMIX	1.04 Gbps	1.33 Gbps
VPN throughput	300 Mbps	350 Mbps
IPS throughput	700 Mbps	900 Mbps
NGFW (IPS + App Ctrl + WebFilter) max.	270 Mbps	310 Mbps
Antivirus throughput (proxy)	430 Mbps	520 Mbps
Concurrent connections	3,200,000	6,000,000
New connections/sec	27,500	27,500
Maximum licensed users	unrestricted	unrestricted

Wireless Specification (XG 105w and XG 115w only)		
No. of antennas 3 external		
MIMO capabilities 3 x 3:3		
Wireless interface	802.11a/b/g/n (2.4 GHz / 5 GHz)	

Physical interfaces				
Storage (local quarantine/logs)	integrated SSD			
Ethernet interfaces (fixed)	4 GE copper			
I/O ports (rear)	2 x USB 2.0 1 x COM (RJ45) 1 x VGA			
Power supply	External auto ranging DC: 12V, 100-240VAC, 50-60 Hz			
Physical specifications				
Mounting	Rackmount kit available (to be ordered separately)			
Dimensions Width x Depth x Height	225 x 150 x 44 mm 8.86 x 5.91 x 1.73 inches			
Weight	1.19 kg / 2.62 lbs (unpacked) 2.185 kg / 4.82 lbs (packed)			


Sophos XG Series Desktop Appliances: XG 125, XG 125w, XG 135, XG 135w

Technical Specifications

These powerful firewall appliances offer 1U performance with a desktop form factor and price. If you have a small business or branch offices to protect and are working on a tight budget, these models are the ideal choice. They are also available with integrated 802.11ac wireless LAN for optimal coverage and connectivity for your mobile workers. Built upon the latest Intel architecture, our software makes optimal use of the multi-core technology to provide excellent throughput for all your key processes. These models come equipped with 8 GbE copper ports built-in.



Back View



1 x COM (RJ45) 8 x 1GbE copper port

Environment	
Power consumption	12.46W, 49.3 BTU/hr (idle) 26.16W, 89.2 BTU/hr (full load)
Operating temperature	0-40°C (operating) -20 to +80°C (storage)
Humidity	10%-90%, non-condensing
Product Certifications	
Certifications	CB, CE, FCC Class B, IC, VCCI,

MIC, RCM, UL, CCC

Performance ¹	XG 125(w) Rev. 2	XG 135(w) Rev. 2
Firewall throughput	5 Gbps	7 Gbps
Firewall IMIX	1.75 Gbps	2.75 Gbps
VPN throughput	410 Mbps	950 Mbps
IPS throughput	1 Gbps	1.75 Gbps
NGFW (IPS + App Ctrl + WebFilter) max.	360 Mbps	880 Mbps
Antivirus throughput (proxy)	590 Mbps	1.4 Gbps
Concurrent connections	6,200,000	8,200,000
New connections/sec	35,000	82,000
Maximum licensed users	unrestricted	unrestricted

Wireless Specification (XG 125w and XG 135w only)				
No. of antennas 3 external				
MIMO capabilities	3 x 3:3			
Wireless interface802.11a/b/g/n/ac (2.4 GHz / 5 GHz)				

Physical interfaces	
Storage (local quarantine/logs)	integrated SSD
Ethernet interfaces (fixed)	8 GE copper
I/O ports (rear)	2 x USB 2.0 1 x COM (RJ45) 1 x VGA
Power supply	External auto ranging DC: 12V, 100-240VAC, 50-60 Hz

Physical specifications				
Mounting	Rackmount kit available (to be ordered separately)			
Dimensions Width x Depth x Height	288 x 186.8 x 44 mm 11.38 x 7.35 x 1.73 inches			
Weight	1.7 kg / 3.75 lbs (unpacked) 2.82 kg / 6.22 lbs (packed)			

Sophos XG Series Rackmount Appliances: XG 210, XG 230

Technical Specifications

The Sophos XG 210 and XG 230 are designed to protect small to mid-sized businesses and branch offices. Based on the latest Intel technology and equipped with 6 GbE copper ports, 2 GbE SFP fiber ports plus one FleXi Port slot to configure with an optional module, they provide high flexibility and throughput at an excellent price-to-performance ratio. An external redundant power supply is optional for these models.

Front View				
	E copper – fixed 2 x GE SFP 2 bypass pairs – fixed			
Navigation 2 x Micro USB for LCD USB 3.0	1 x expansion bay (shown here with optional FIeXi Port module)			
Back View				
	Connector for optional 2nd external power supply Power supply			
• · ·				
Connector for HDMI 1x Power switch uSB 3.0				
Environment				
Power consumption	XG 210: 19W, 65 BTU/hr (idle) 35W, 119 BTU/hr (full load) XG 230: 21W, 72 BTU/hr (idle) 41W, 141 BTU/hr (full load)			
Operating temperature 0-40°C (operating) -20 to +80°C (storage)				
lumidity 10%-90%, non-condensing				
Product Certifications				
Certifications	CB, UL, CE, FCC Class A, ISED, VCCI, RCM, CCC BIS (planned), MSIP/KCC (planned)			

Performance ¹	XG 210 Rev. 3	XG 230 Rev. 2
Performance	AG ZIO Rev. 3	AG 200 Rev. 2
Firewall throughput	16 Gbps	20 Gbps
Firewall IMIX	5.5 Gbps	6.8 Gbps
VPN throughput	1.45 Gbps	1.7 Gbps
IPS throughput	2.7 Gbps	4.2 Gbps
NGFW (IPS + App Ctrl) max.	2.2 Gbps	3 Gbps
Antivirus throughput (proxy)	2.3 Gbps	2.8 Gbps
Concurrent connections	8,200,000	8,200,000
New connections/sec	135,000	140,000
Maximum licensed users	unrestricted	unrestricted

Physical interfaces		
Storage (local quarantine/logs)	integrated SSD	
Ethernet interfaces (fixed)	6 GE copper (incl. 2 bypass pairs) 2 GE SFP*	
No. of FleXi Port slots	1	
FleXi Port modules (optional)	8 port GE copper 8 port GE SFP* 2 port 10 GE SFP+* 4 port 10 GE SFP+* 2 port 40 GE QSFP+* 4 port GE PoE 8 port GE PoE 4 port GE copper LAN bypass	
I/O ports	2 x USB 3.0 (front) 1 x Micro USB (front) 1 x USB 3.0 (rear) 1 x COM (RJ45) (front) 1 x HDMI (rear)	
Display	Multi-function LCD module	
Power supply	Internal auto-ranging 100-240VAC, 50-60 Hz Redundant PSU optional (external)	

Physical specifications			
Mounting	1U rack mount (2 rackmount ears included)		
Dimensions Width x Depth x Height	438 x 344.4 x 44mm 17.24 x 13.56 x 1.75 inches		
Weight	5.2 kg / 11.46lb (unpacked) 7.7 kg / 16.98 lbs (packed)		

Sophos XG Series Rackmount Appliances: XG 310, XG 330

Technical Specifications

The Sophos XG 310 and XG 330 are scalable appliances suitable for distributed organizations or mid-sized companies. With solid-state drives for on-box reporting, logs and spam quarantine, they're highly responsive even in high traffic environments. Each model is equipped with 8 GbE copper ports, 2 GbE SFP fiber ports, 2 10 GbE SFP+ fiber ports plus one FleXi Port slot to configure with an optional module. They provide optimal performance and flexibility plus redundancy through an optional external power supply.

Front View						
Multi-function LCD display	1×COM (RJ45)	8 x GE copper Incl. 2 bypass		2 x 10 SFP+	GE - fixed	
SOPHOS HERRO SOPHOS Protection	200 1				8	*** *** ***
Navigation for LCD	2 x USB 3.0	Micro USB	2 x GE – fixe		(show	k expansion bay n here with optional eXi Port module)
Back View						
				tor for opti ernal pow		Power supply
•	•			-		
Connector for optional PoE Power			HDMI	1 x USB 3.0	Power switch	
Environmer	nt					
Power consumption XG 310: 32W, 109 BTU/hr (idle) 49W, 167 BTU/hr (full load) XG 330: 36W, 122 BTU/hr (idle) 54W, 184 BTU/hr (full load)		ull load) J/hr (idle)				
Operating temperature 0-40°C (operating) -20 to +80°C (storage)			0,			
Humidity		10%-90%, non-condensing		lensing		
Product Certifications						
Certifications				ISED, V	CE, FCC Cla CCI, RCM, MSIP/KCI	

Performance ¹	XG 310 Rev. 2	XG 330 Rev. 2
Firewall throughput	28 Gbps	33 Gbps
Firewall IMIX	9.5 Gbps	12.5 Gbps
VPN throughput	2.75 Gbps	3.2 Gbps
IPS throughput	5.5 Gbps	8.5 Gbps
NGFW (IPS + App Ctrl) max.	4 Gbps	5.5 Gbps
Antivirus throughput (proxy)	3.3 Gbps	6 Gbps
Concurrent connections	17,500,000	17,500,000
New connections/sec	200,000	200,000
Maximum licensed users	unrestricted	unrestricted

Physical interfaces	
Storage (local quarantine/logs)	integrated SSD
Ethernet interfaces (fixed)	8 GE copper (incl. 2 bypass pairs) 2 GE SFP* 2 10 GE SFP+*
No. of FleXi Port slots	1
FleXi Port modules (optional)	8 port GE copper 8 port GE SFP* 2 port 10 GE SFP+* 4 port 10 GE SFP+* 2 port 40 GE QSFP+* 4 port GE PoE 8 port GE PoE 4 port GE copper LAN bypass
I/O ports	2 x USB 3.0 (front) 1 x Micro USB (front) 1 x USB 3.0 (rear) 1 x COM (RJ45) (front) 1 x HDMI (rear)
Display	Multi-function LCD module
Power supply	Internal auto-ranging 100-240VAC, 50-60 Hz Redundant PSU optional (external)
Physical specifications	
Mounting	1U rack mount (2 rackmount ears included)
Dimensions Width x Depth x Height	438 x 405.5 x 44mm 17.24 x 15.96 x 1.75 inches
Weight	5.8 kg / 12.78 lbs (unpacked) 8.8 kg / 19.4 lbs (packed)

Sophos XG Series Rackmount Appliances: XG 430, XG 450

Technical Specifications

The Sophos XG 430 and XG 450 offer enterprise performance for distributed organizations or larger mid-sized companies. The connectivity options are second to none for rack mountable appliances, with each model coming equipped with 8 GbE copper ports, 2 10 GbE SFP+ ports and 2 additional FleXi Port slots which you can configure with your choice of optional modules. For high-availability, the XG 450 also offers unparalleled redundancy features in a 1U appliance with a second SSD (RAID) integrated and an optional second power supply is available for both models.

Front View	
) x GE copper – fixed ncl. 2 bypass pairs
I I Navigation 2 x Micro USB for LCD USB 3.0	I I 2 x GE SFP+ 2 x expansion bay – fixed (shown here with optional FleXi Port module)
Back View XG 430	
	Connector for optional 2nd external power supply Power supply
Connector for optional PoE Power	HDMI 1x Power switch USB 3.0
Back View XG 450	
	Power switch Power supply
•	
Connector for optional PoE Power	HDMi 1x Space for optional 2nd hot USB 3.0 swappable power supply
Environment	
Power consumption	XG 430: 28W, 96 BTU/hr (idle) 79W, 270 BTU/hr (full load) XG 450: 31W, 107 BTU/hr (idle) 83W, 283 BTU/hr (full load)
Operating temperature	0-40°C (operating) -20 to + 80°C (storage)
Humidity	10%-90%, non-condensing
Product Certifications	
Certifications	CB, UL, CE, FCC Class A,

ISED, VCCI, RCM, CCC BIS (planned), MSIP/KCC (planned)

Performance ¹	XG 430 Rev. 2	XG 450 Rev. 2
Firewall throughput	41 Gbps	50 Gbps
Firewall IMIX	14.5 Gbps	17.5 Gbps
VPN throughput	4.8 Gbps	5.5 Gbps
IPS throughput	9 Gbps	10 Gbps
NGFW (IPS + App Ctrl) max.	6 Gbps	7.5 Gbps
Antivirus throughput (proxy)	6.5 Gbps	7 Gbps
Concurrent connections	20,000,000	20,000,000
New connections/sec	200,000	200,000
Maximum licensed users	unrest	ricted

Physical interfaces		
Storage (local quarantine/logs)	integrated SSD	2 x integrated SSD
Ethernet interfaces (fixed)	8 GE copper (incl. 2 bypass pairs) 2 10 GE SFP+*	
No. of FleXi Port slots	1	2
FleXi Port modules (optional)	8 port (2 port 10 4 port 10 2 port 40 4 port 8 port	E copper GE SFP* GE SFP+* GE SFP+* GE QSFP+* GE PoE GE PoE Der LAN bypass
I/O ports	2 x USB 3.0 (front) 1 x Micro USB (front) 1 x USB 3.0 (rear) 1 x COM (RJ45) (front) 1 x IPMI (front) 1 x HDMI (rear)	
Display	Multi-function LCD module	
Power supply	Internal auto- ranging 100- 240VAC, 50-60 Hz Redundant PSU optional (external)	Internal auto- ranging 100- 240VAC, 50-60 Hz Hot Swap Redundant PSU optional (internal)
Dhuninglangeitigeti		
Physical specifications		
Mounting		sliding rails incl.)
Dimensions Width x Depth x Height	438 x 507.7 x 44mm 17.24 x 19.99 x 1.75 inches	
Weight	7.6 kg / 16.76 lbs (unpacked)	7.8 kg / 17.2 lbs (unpacked)

13.7 kg / 30.2

lbs (packed)

* Transceivers (mini GBICs) sold separately

14.8 kg / 32.63


lbs (packed)


Sophos XG Series Rackmount Appliances: XG 550, XG 650

Technical Specifications


The Sophos XG 550 and XG 650 are high-performance firewalls equipped to provide protection for larger distributed and growing organizations. They offer CPU technology to effortlessly handle use as an all-in-one solution or a powerful nextgeneration firewall. The models offer either 4 (XG 550) or 6 (XG 650) FleXi Port expansion bays to tailor your connectivity to your environment. An 8 port GbE copper module is supplied as a default. Hot-swappable dual SSDs and power supplies are standard redundancy features in this class.

Front View XG 550





Back View



nower supply

Environment	
Power consumption	XG 550: 270.5W, 922.98BTU/hr (idle) 416.1W, 1419.79BTU/hr (full load) XG 650: 320.5W, 1093.59BTU/hr (idle) 493.1W, 1682.53BTU/hr (full load)
Operating temperature	0-40°C (operating) -40 to +70°C (storage)
Humidity	5%-90%, non-condensing
Product Certifications	
Certifications	CE, UL, FCC, ISED, CCC, VCCI, RCM, BIS (CRS)

Performance ¹	XG 550 Rev. 2	XG 650 Rev. 2
Firewall throughput	65 Gbps	85 Gbps
Firewall IMIX	23 Gbps	28 Gbps
VPN throughput	8.4 Gbps	9 Gbps
IPS throughput	17 Gbps	20 Gbps
NGFW (IPS + App Ctrl + WebFilter) max.	9 Gbps	10 Gbps
Antivirus throughput (proxy)	10 Gbps	13 Gbps
Concurrent connections	30,000,000	
New connections/sec	220,000	240,000
Maximum licensed users	unrest	tricted

Physical interfaces		
Storage (local quarantine/logs)	2 x integrated hot-swap SSD (RAID)	
Ethernet interfaces (removable)	8 GE copper	
No. of FleXi Port slots	4 6	
FleXi Port modules (optional)	8 port GE copper 8 port GE SFP* 2 port 10 GE SFP+* 4 port 10 GE SFP+* 4 port SFP* plus 4 port GE copper LAN bypass 2 x USB 2.0 (front) 1 x USB 3.0 (rear) 2 x Mgmt Port (eth0/eth1, front) 1 x COM (RJ45) (front) 1 x VGA (rear)	
Display	Multi-function LCD module	
Power supply		rnal auto-ranging 50-60 Hz PSU
Physical specifications		
Mounting	2U sliding ra	ils (included)

Mounting	2U sliding rails (included)
Dimensions Width x Depth x Height	438 x 600 x 88 mm 17.24 x 23.62 x 3.46 inches
Weight	17.8 kg / 39.24 lbs (unpacked) 27 kg / 59.53 lbs (packed)

Sophos XG Series Rackmount Appliances:

XG 750

Technical Specifications

The Sophos XG 750 is a high performance firewall suitable for high traffic datacenter and large enterprise environments. Intel multi core technology and redundancy features such as dual SSDs, power supplies and swappable fans, ensure you're protected at all times. With a total of 8 FleXi Port bays, one of which comes equipped with a default 8 port GbE copper module, connectivity knows no bounds and can reach a maximum of 64 ports using the optional modules.

Front View	
2 x management port 2 x hot-swap SSD (RAID-1) 2 x USB 2.0	
Navigation for LCD Multi-function LCD display	e e e e e e e e e e e e e e e e e e e
Back View	
1 x USB 3.0 1	Ix VGA port Power switch Image: space state states
Environment	
Power consumption	326.5W, 1114.01BTU/hr (idle) 512.2W, 1747.62BTU/hr (full load)
Operating temperature	0-40°C (operating) -40 to +70°C (storage)
Humidity	5%-90%, non-condensing
Product Certifications	
Certifications	CE, UL, FCC, ISED, CCC, VCCI, RCM, BIS (CRS)

Performance ¹	XG 750 Rev. 2
Firewall throughput	100 Gbps
Firewall IMIX	33.5 Gbps
VPN throughput	ll Gbps
IPS throughput	22 Gbps
NGFW (IPS + App Ctrl + WebFilter) max.	11.8 Gbps
Antivirus throughput (proxy)	17 Gbps
Concurrent connections	30,000,000
New connections/sec	300,000
Maximum licensed users	unrestricted


Physical interfaces	
Storage (local quarantine/logs)	2 x integrated hot-swap SSD (RAID)
Ethernet interfaces (removable)	8 GE copper
No. of FleXi Port slots	8
FleXi Port modules (optional)	8 port GE copper 8 port GE SFP* 2 port 10 GE SFP+* 4 port 10 GE SFP+* 4 port SFP* plus 4 port GE copper LAN bypass
I/O ports	2 x USB 2.0 (front) 1 x USB 3.0 (rear) 2 x Mgmt Port (eth0/eth1, front) 1 x COM (RJ45) (front) 1 x VGA (rear)
Display	Multi-function LCD module
Power supply	2 x hot-swap external auto ranging 100-240VAC, 50-60 Hz
Physical specifications	
Mounting	2U sliding rails (included)
Dimensions Width x Depth x Height	438 x 600 x 88 mm 17.24 x 23.62 x 3.46 inches
Weight	17.8 kg / 39.24 lbs (unpacked)

27 kg / 59.53 lbs (packed)

FleXi Port Modules

Configure your hardware to suit your infrastructure and change it as and when you need to. Our optional FleXi Port LAN modules give you the freedom to select the connectivity you need – copper, fiber, 10GbE – you decide.

In some cases, FleXi Port modules are interchangeable within a range of appliances, so, for example, you can use the same module with all of your 1U appliances which saves you money if you upgrade to a higher model at a later date.

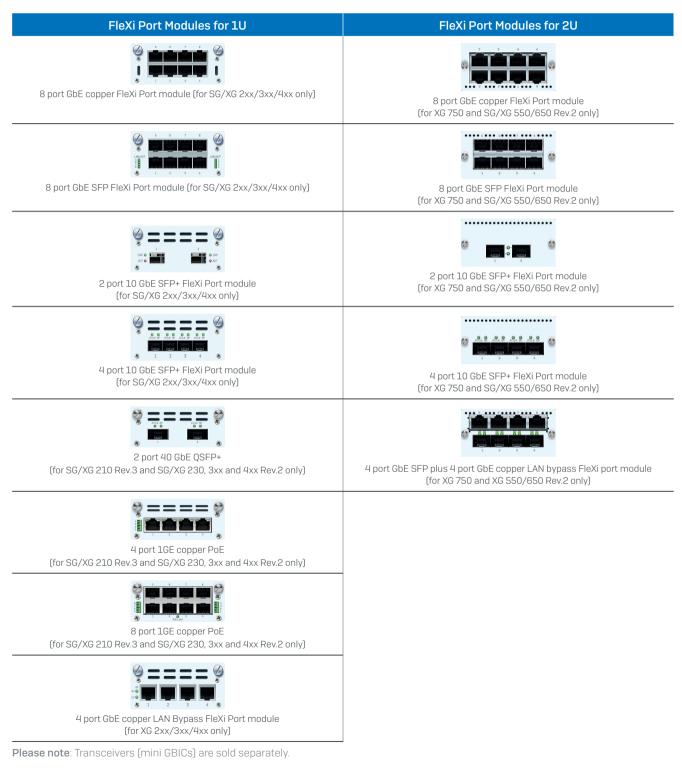

Sophos Wireless Protection

Get secure and reliable wireless access all over the office

Simplify your wireless networking by using your Sophos XG Firewall as a wireless controller to centralize your Wi-Fi management and security. Sophos Wireless Protection is included in the Base Firewall license and for example, provides full hotspot support to simply set up guest and visitor access. Our optional access points are automatically set up and configured by the firewall. That means all your wireless clients get complete threat protection too.

Choose your Access Point

Our APs are built on the latest enterprise-class, high-speed wireless chipsets with custom designed antennas, added CPU and memory resources, and hardware accelerated encryption. Find out more.

Hardware Appliances with integrated WiFi

All our XG Series desktop appliances are available with an integrated wireless access point. Coverage can be further extended by adding Sophos Access Points. Please see the Hardware section for further details.


Sophos RED (Remote Ethernet Device)

Turn any location into a secure location with our Remote Ethernet Devices (RED)

If you have branch offices, retail locations, remote outposts or otherwise need to extend your secure network easily and affordably beyond your main facility, Sophos Remote Ethernet Devices are the ideal solution. Uniquely simple and imminently affordable, RED provides an elegant solution to building a secure distributed network.

Plug-and-protect

Sophos RED makes extending your secure network to other locations easy. It requires no technical skills at the remote site; simply enter the RED device ID into your XG Firewall console and ship it. As soon as it's plugged in and connected to the Internet, it will contact your firewall and establish a secure dedicated VPN tunnel. It's that easy.

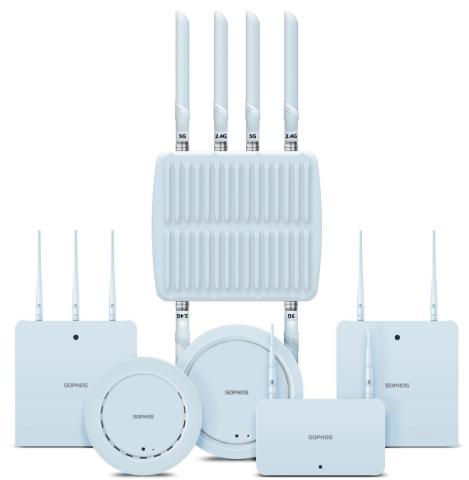

Sophos Firewall Manager (SFM)

Sophos Firewall Manager (SFM) provides powerful centralized management for all your Sophos Firewalls across multiple customers sites or branch offices all from a single screen. Whether you're an MSP, Enterprise Network Security Admin, or simply managing a few small offices, SFM simplifies security management enabling consistent enforcement, easy provisioning of new policies, and at-aglance monitoring of device health. SFM saves you time, money and makes management simpler.

Comprehensive Centralized Management

Manage all Firewall policies and configuration from single console.

Insightful Monitoring

At-a-glance device and network health indicators.

Extensive Administrative controls

Role-based administration, change control and logging.

Flexible Deployment Options

Available as Hardware, Software, or Virtual appliance.

Sophos iView v2

Monitoring a distributed network across multiple locations can be a challenge. That's where Sophos iView can help. It provides you with an intelligent, uninterrupted view of your network from a single pane of glass. If you have multiple appliances, need consolidated reporting, or could just use help with log management or compliance, Sophos iView is the ideal solution.

Consolidated reporting

Aggregated reporting across multiple Sophos and Cyberoam firewall devices.

User-based Reporting

Our patented Layer-8 user identity provides visibility into user activities regardless of where they're working.

Security intelligence


Identify potential network issues and possible attacks anywhere across your network.

Log backup and management

Logs data from multiple devices at distributed locations with smart indexing and easy search facilities.

Deployment options

Available as software ISO or virtual appliance.

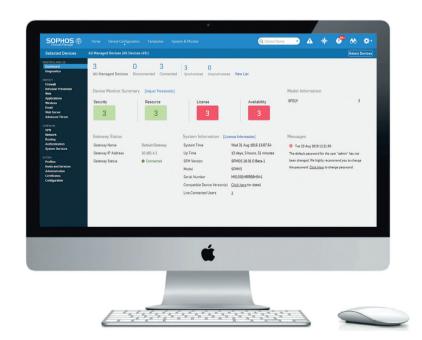

Try it for free - business and even at home

If you have any additional questions visit sophos.com or give one of our Sales Agents a call.

Free 30-day trial – no strings attached

If you'd like to take it for a test drive you can get the full-featured product simply sign-up for our free 30-day trial.

See it in action now

You can take a walkthrough of the user interface with our interactive demo or watch videos showing you just how we make network security simple. Visit sophos.com/xgfirewall

Free Home Use version

Our Sophos XG Firewall Home Edition is a fully-equipped software version that gives you complete network, web, mail, and web application security with VPN functionality, for home-use only and limited to 4 virtual cores, 6 GB of RAM. **Visit sophos.com/freetools**

¹ General: Max. throughput measured under ideal test conditions using SF-OS 16.5 with App-classification disabled using industry standard Spirent /Avalanche performance test and Ixia test tools. Actual performance may vary depending on network conditions and activated services.

FW: UDP throughput based on RFC 2544 using 1518 Byte packet size.

• FW IMIX: UDP throughput based on a combination of 48 bytes, 576 bytes and 1518 bytes packet sizes.

+ IPS/NGFW: HTTP throughput using default IPS ruleset and 512KB object size (NGFW: with AppCtrl enabled)

• VPN: HTTP throughput using multiple tunnels and 512KB HTTP response size

 $\scriptstyle \star$ AV: HTTP throughput using Web proxy and 200KB response size

United Kingdom and Worldwide Sales Tel: +44 (0)8447 671131 Email: sales@sophos.com

North American Sales Toll Free: 1-866-866-2802 Email: nasales@sophos.com Australia and New Zealand Sales Tel: +61 2 9409 9100 Email: sales@sophos.com.au

Asia Sales Tel: +65 62244168 Email: salesasia@sophos.com

Registered in England and Wales No. 2096520, The Pentagon, Abingdon Science Park, Abingdon, 0X14 3YP, UK Sophos is the registered trademark of Sophos Ltd. All other product and company names mentioned are trademarks or registered trademarks of their respective owners.



[©] Copyright 2017. Sophos Ltd. All rights reserved